

## QSFP+

### EQ854X-3LCD02

#### 40G QSFP+ SWDM4 850-940nm 240m Optical Transceiver

- Compliant with QSFP+ MSA
- Compliant with SWDM MSA
- Compliant with SFF-8636
- Compliant with IEEE 802.3ba
- Hot-pluggable QSFP+ form factor
- 4x10Gb/s VCSEL-based SWDM transmitter
- Supports 41.2Gbps aggregate bit rate
- Power dissipation < 3.5W
- Maximum link length of 240m on OM3 MMF and 350m on OM4 MMF
- Case temperature range of 0° C to 70° C
- Duplex LC receptacles
- XLPP electrical interface
- RoHS compliant



## Applications

- 40G Ethernet over Duplex MMF

## Description

The 40G QSFP+ WDM4 transceiver modules are designed for use in 40G Ethernet links over duplex multimode fiber. Four channels/lanes in the 850-940nm region @ 10Gbps to transport the Ethernet signal. Digital diagnostics functions are available via an I2C interface, as specified by the QSFP+ MSA.

## Absolute Maximum Ratings

Parameter	Symbol	Min	Max	Units
Storage Temp Range	Ts	-40	+85	°C
Supply Voltage	Vcc	-0.5	3.6	V
Relative Humidity	RH	15%	85%	

## Operating Conditions

Parameter	Symbol	Min	Max	Units
Case Temp-Operating	Tcase	0	70	°C
Supply Voltage	Vcc	3.14	3.46	V
Power Consumption	P		3.5	W
Link Distance on OM3 Fiber		2	240	M
Link Distance on OM4 Fiber		2	350	M
Link Distance on OM5 Fiber		2	440	M

## Optical Characteristics

Transmitter Parameter	Lane	Min	Typical	Max	Unit	Note
Signaling rate, each lane		10.3125 , 9.953±100ppm			Gb/s	
Lane Wavelength Range	Lane0	844		858	nm	
	Lane1	874		888		
	Lane2	904		918		
	Lane3	934		948		
Difference in launch power between any two lanes				4.5	dBm	
RMS Spectral width					nm	

@850nm	Lane0			0.53		
@880nm,910nm,940nm	Lane1,2,3			0.59		
Optical Modulation Amplitude (OMA), each lane		-5.5		3	dBm	
Average Launch power per Lane		-7.5		3	dBm	
Launch Power Tx OMA-TDP	Lane0	-6.4			dBm	
	Lane1	-6.0				
	Lane2	-6.5				
	Lane3	-7.0				
Transmitter and Dispersion Eye Closure	Lane0			3.7	dB	
	Lane1			4.0		
	Lane2			4.5		
	Lane3			5.0		
Extinction Ratio		2			dB	
Optical Return Loss Tolerance		12			dB	
Average Launch Power per Lane @ TX Off State				-30	dBm	
Encircled Flux		>=86% at 19um <=30% at 4.5um				
Transmitter eye mask definition {X1, X2, X3, Y1, Y2, Y3} Hit ratio 5x10-5 hits per sample		{0.23,0.34,0.43,0.27,0.35,0.4}				
<b>Receiver Parameter</b>	<b>Lane</b>	<b>Min</b>	<b>Typical</b>	<b>Max</b>	<b>Unit</b>	<b>Note</b>
Signaling rate, each lane		10.3125 , 9.953±100ppm			Gb/s	
Lane Wavelength Range	Lane0	844		858	nm	
	Lane1	874		888		
	Lane2	904		918		
	Lane3	934		948		
Damage threshold, each lane		3.8			dBm	
Average Receive Power, each lane		-12.9			dBm	
		-12.5		2.4		
		-12.2				
		-11.9				
Receiver Power, each lane (OMA)				3	dBm	
Receiver sensitivity OMA, per lane				-9.1	dB	
Difference in receive power between any two lanes(OMA)				5	dB	
RX_Los_Assert		-30			dBm	
RX_Los_De-ASSERT				-13	dBm	
RX_Los_Hysteresis		0.5			dBm	
Return reflectance				-12	dB	

## Digital Diagnostic Monitoring Specifications

Parameters	Unit	Specification
Temperature Monitor	°C	± 3
Voltage Monitor	V	± 5 %
I_bias Monitor	mA	± 10 %
Received Power (Rx) Monitor	dB	± 3.0
Transmit Power (Tx) Monitor	dB	± 3.0

## Electrical Characteristics

Transmitter electrical input signal characteristics(TP1)	Min	Typical	Max	Units	Conditions
Single ended input voltage tolerance	-0.3		4	V	Referred to TP1 signal common
AC common-mode input voltage tolerance	15			mV	RMS
Differential input return loss	See 86A.4.1.1			dB	10MHz to 11.1GHz
Differential to common-mode input return loss	10			dB	10MHz to 11.1GHz
J2 Jitter tolerance	0.17			UI	
J9 Jitter tolerance	0.29			UI	
Data Dependent Pulse Width Shrinkage(DDPWS) tolerance	0.07			UI	
<b>Specification values</b>					
Eye mask coordinates: X1,X2 Y1,Y2	0.11,0.31 95,350			UI mV	Hit Ratio=5E-5
Crosstalk calibration signal VMA	850			mV	While calibrating compliance signal
Crosstalk calibration signal transition times, 20% to 80%	34			ps	
Receiver electrical output signal characteristics(TP4)	Min	Typical	Max	Unit	
Single ended output voltage tolerance range	-0.3		4	V	Referred to signal common
AC common-mode output voltage (RMS)			7.5	mV	
Termination mismatch at 1MHz			5	%	
Differential output return loss	See 86A.4.2.1			dB	10MHz to 11.1 GHz
Common-mode output return loss	See 86A.4.2.2			dB	10MHz to 11.1 GHz
Output transition time,20% to 80%	28			ps	
J2 Jitter output			0.42	UI	

J9 Jitter output		0.65	UI	
		<b>Specification values</b>		
Eye mask coordinates: X1,X2 Y1,Y2	0.29,0.5 150,425		UI mV	Hit ratio=5E-5
Crosstalk source VMA, each lane	700		mV	At TP1a
Crosstalk source transition times,20% to 80%	37		PS	At TP1a

## QSFP+ Connector and Pinout Description

The electrical interface to the transceiver is a 38 pins edge connector. The 38 pins provide high speed data, low speed monitoring and control signals, I2C communication, power and ground connectivity. The top and bottom views of the connector are provided below, as well as a table outlining the contact numbering, symbol and full description.

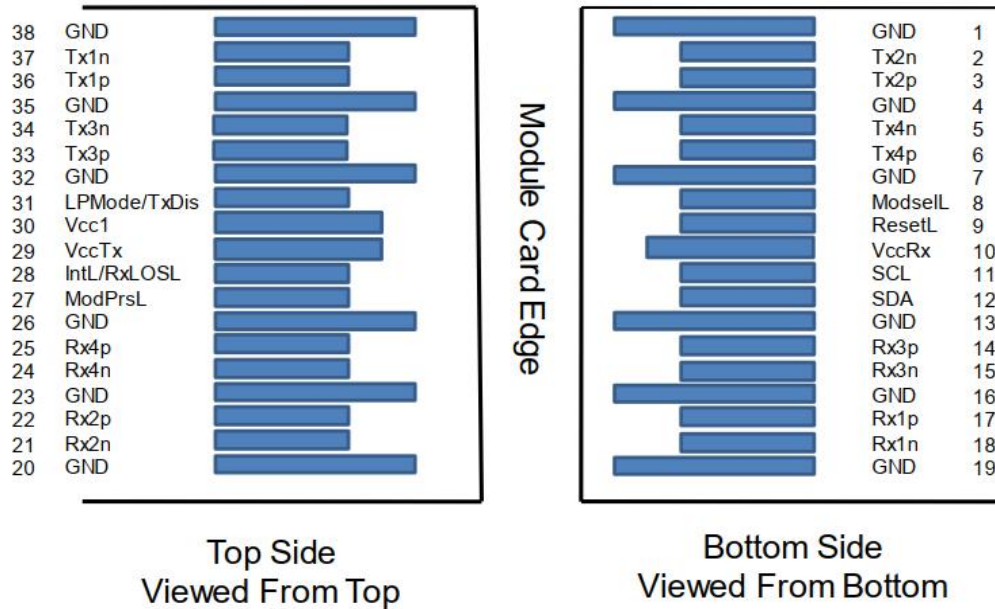


Figure 1. QSFP+ 38-pin connector

Pin	Symbol	Name/Description	NOTE
1	GND	Transmitter Ground (Common with Receiver Ground)	1
2	Tx2n	Transmitter Inverted Data Input	
3	Tx2p	Transmitter Non-Inverted Data output	
4	GND	Transmitter Ground (Common with Receiver Ground)	1
5	Tx4n	Transmitter Inverted Data Input	
6	Tx4p	Transmitter Non-Inverted Data output	
7	GND	Transmitter Ground (Common with Receiver Ground)	1
8	ModSelL	Module Select	
9	ResetL	Module Reset	
10	VccRx	3.3V Power Supply Receiver	2

11	SCL	2-Wire serial Interface Clock	
12	SDA	2-Wire serial Interface Data	
13	GND	Transmitter Ground (Common with Receiver Ground)	
14	Rx3p	Receiver Non-Inverted Data Output	
15	Rx3n	Receiver Inverted Data Output	
16	GND	Transmitter Ground (Common with Receiver Ground)	1
17	Rx1p	Receiver Non-Inverted Data Output	
18	Rx1n	Receiver Inverted Data Output	
19	GND	Transmitter Ground (Common with Receiver Ground)	1
20	GND	Transmitter Ground (Common with Receiver Ground)	1
21	Rx2n	Receiver Inverted Data Output	
22	Rx2p	Receiver Non-Inverted Data Output	
23	GND	Transmitter Ground (Common with Receiver Ground)	1
24	Rx4n	Receiver Inverted Data Output	1
25	Rx4p	Receiver Non-Inverted Data Output	
26	GND	Transmitter Ground (Common with Receiver Ground)	1
27	ModPrsl	Module Present	
28	IntL	Interrupt	
29	VccTx	3.3V power supply transmitter	2
30	Vcc1	3.3V power supply	2
31	LPMODE	Low Power Mode, not connect	
32	GND	Transmitter Ground (Common with Receiver Ground)	1
33	Tx3p	Transmitter Non-Inverted Data Input	
34	Tx3n	Transmitter Inverted Data Output	
35	GND	Transmitter Ground (Common with Receiver Ground)	1
36	Tx1p	Transmitter Non-Inverted Data Input	
37	Tx1n	Transmitter Inverted Data Output	
38	GND	Transmitter Ground (Common with Receiver Ground)	1

Notes:

1. GND is the symbol for signal and supply (power) common for QSFP+ modules. All are common within the QSFP+ module and all module voltages are referenced to this potential unless otherwise noted. Connect these directly to the host board signal common ground plane.

2. VccRx, Vcc1 and VccTx are the receiving and transmission power suppliers and shall be applied concurrently. Recommended host board power supply filtering is shown below. Vcc Rx, Vcc1 and Vcc Tx may be internally connected within the QSFP+ transceiver module in any combination. The connector pins are each rated for a maximum current of 1000mA.

## Mechanical Dimensions

Unit: mm

Pull tab color: Gray ,Pantone 424U

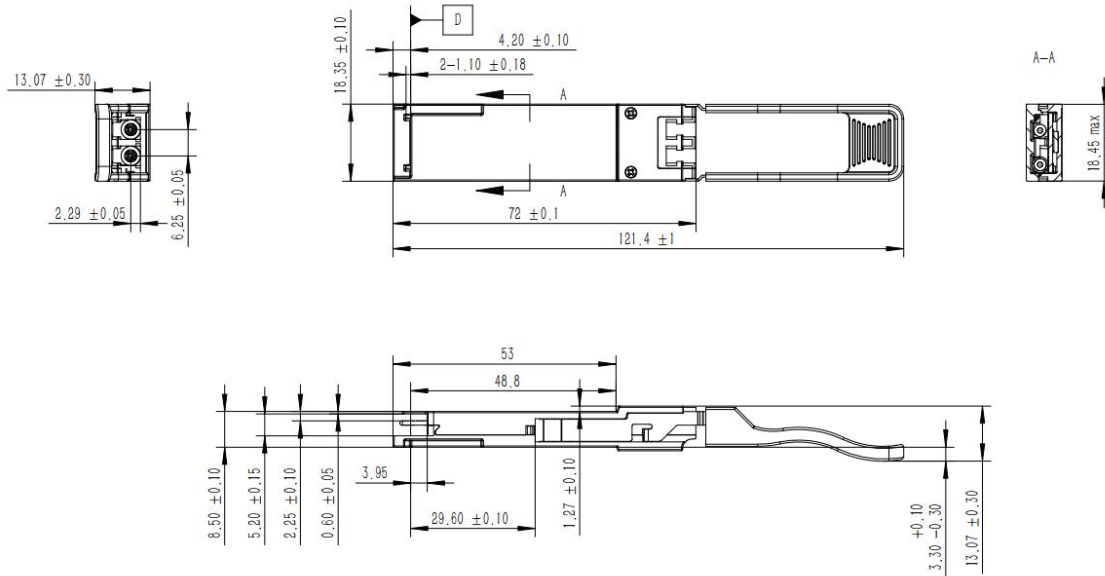


Figure 2. Mechanical dimensions

## Ordering Information

Part Number	Product Description
EQ854X-3LCD02	40G QSFP+ SWDM4 850-940nm 240m Optical Transceiver

## Compatibility Test

In order to ensure the product compatibility, our products will be tested on the switch before shipment. Our modules can be compatible with many mainstream brand switches, such as Cisco, Juniper, Extreme, Brocade, IBM, H3C, HP, Huawei, D-Link, Mikrotik, ZTE, TP-Link...

Our test equipment: VOLKTEK MEN-4110, HP 2530-8G, CRS226-24G-25+RM, Catalyst 2960G Series, Catalyst 3850 XS 10G SFP+, Catalyst 3750-E Series, HUAWEI S5700Series, H3C S3100V2 Series, Juniper-EX4200, etc.



**Cisco Catalyst 3850**



**HUAWEI S5700**



**H3C S3100V2**



**HP J9264AR**



**Juniper EX 4200**



**Alcatel 6850E-U24X**



**Mikrotik CR5226-24G-25+RM**



**Cisco Catalyst 2960G**



**Volktek MEN-4110**



## Product Production Process

# Quality Assurance

Continuous introduction of new equipment, produced by strict standards, strict quality inspection, to guarantee the high quality standard of each product.



**Standardized  
Production Line**




**Professional  
Welding**



**Assembling**



**Aging Testing**



**Distance Testing**



**Cleaning end face**



**Product Initial Test**



**Switch Testing**



**Product Final Test**

## Packaging

ETU-Link provides two kinds of packaging, 10pcs/Tray and individual package.



Company: ETU-Link Technology Co., LTD

Address: Right side of 3rd floor, No. 102 building, Longguan expressway, Dalang street,  
Longhua District, Shenzhen city, Guangdong Province, China 518109

Tel: +86-755 2328 4603

Addresses and phone number also have been listed at [www.etulinktechnology.com](http://www.etulinktechnology.com).

Please e-mail us at [sales@etulinktechnology.com](mailto:sales@etulinktechnology.com) or call us for assistance.