


ETU-LINK

Optical Communication System

XFP Series

XFP

EXCxx92-3LCD80

10Gbps CWDM 1470~1610nm 80KM XFP Transceiver

- Wavelength selectable to ITU-T standards covering CWDM grid wavelengths
- XFP MSA Rev 4.5 Compliant
- Data rate from 9.95Gbps to 11.3Gbps
- No Reference Clock required
- Cooled EML and APD receiver
- link length up to 80KM
- Low Power Dissipation 3.5W Maximum
- XFI and line side loopback Mode Supported
- -5°C to 70°C Operating Case Temperature
- Diagnostic Performance Monitoring of module temperature, Supply Voltages, laser bias current, transmit optical power, and receive optical power
- RoHS6 compliant (lead free)



Applications

- SONET OC-192& SDH STM 64
- CWDM 80km 10G Ethernet
- CWDM 80km 10G Fiber Channel
- CWDM Networks
- CWDM 80km 10G Ethernet with FEC

Description

ETU-Link EXCxx92-3LCD80 Transceiver exhibits excellent wavelength stability, supporting operation at 100GHz channel, cost effective module. It is designed for 10G CWDM SDH, 10GBASE-ZR/ZW and 10G Fiber-Channel applications.

The transceiver consists of two sections: The transmitter section incorporates a cooled EML laser. And the receiver section consists of an APD photodiode integrated with a TIA. All modules satisfy class I laser safety requirements. ETU-Link CWDM XFP transceiver provides an enhanced monitoring interface, which allows real-time access to device operating parameters such as transceiver temperature, laser bias current, transmitted optical power, received optical power, and transceiver supply voltage.

Absolute Maximum Ratings

Parameter	Symbol	Min	Typ	Max	Unit
Maximum Supply Voltage	V _{CC3}	-0.5		4.0	V
Storage Temperature	T _S	-40		85	°C
Case Operating Temperature	T _{OP}	-5		75	°C

Product Selection

EXCxx92-3LCD80

Wavelength	xx	Clasp Color Code	Wavelength	xx	Clasp Color Code
1470 nm	47	Gray	1550 nm	55	Yellow
1490 nm	49	Purple	1570 nm	57	Orange
1510 nm	51	Blue	1590 nm	59	Red
1530 nm	53	Green	1610nm	61	Brown

Electrical Characteristics (T_{OP} = -5 to 75 °C, V_{CC3} = 3.13 to 3.45 Volts)

Parameter	Symbol	Min	Typ	Max	Unit
Supply Voltage	V _{CC3}	3.13		3.45	V
Supply Current	I _{CC3}			600	mA
Module total power	P			2.0	W
Transmitter					
Input differential impedance	R _{in}		100		Ω
Differential data input swing	V _{in,pp}	120		820	mV
Transmit Disable Voltage	V _D	2.0		V _{CC}	V
Transmit Enable Voltage	V _{EN}	GND		GND+ 0.8	V
Transmit Disable Assert Time				10	us
Receiver					
Differential data output swing	V _{out,pp}	340	650	850	mV
Data output rise time	t _r			38	ps
Data output fall time	t _f			38	ps
LOS Fault	V _{LOS fault}	V _{CC} - 0.5		V _{CC_HOST}	V

LOS Normal	$V_{LOS\ norm}$	GND		GND+0.5	
Power Supply Rejection	PSR			See Note 7 below	

Notes:

- 1) Maximum total power value is specified across the full temperature and voltage range.
- 2) After internal AC coupling.
- 3) Or open circuit.
- 4) Into 100 ohms differential termination.
- 5) 20 – 80 %
- 6) Loss of Signal is open collector to be pulled up with a 4.7k – 10kohm resistor to 3.15 – 3.6V. Logic indicates normal operation; logic 1 indicates no signal detected.
- 7) Per Section 2.7.1. in the XFP MSA Specification¹.

Optical Characteristics ($T_{OP} = -5$ to 75 °C, $V_{CC3} = 3.13$ to 3.45 Volts)

Parameter	Symbol	Min	Typ	Max	Unit
Transmitter					
Average Optical Power	P_f	0		5.0	dBm
Optical Wavelength	λ	(X-6.5)	(X+1)	(X+6.5)	nm
Sidemode Suppression ratio	SSR_{min}	30			dB
Optical Extinction Ratio	ER	3.5			dB
Transmitter and Dispersion Penalty	TDP			3.2	dB
Average Launch power of OFF transmitter	P_{OFF}			-30	dBm
Tx Jitter	Tx_j				Per 802.3ae requirements
Relative Intensity Noise	RIN			-130	dB/Hz
Receiver					
Receiver Sensitivity	R_{SENS1}			-24.4	dBm
Maximum Input Power	P_{MAX}	+0.5			dBm
Optical Center Wavelength	λ_C	1260		1610	nm
Receiver Reflectance	R_{RX}			-27	dB
LOS De-Assert	LOS_D			-27	dBm
LOS Assert	LOS_A	-32			dBm
LOS Hysteresis		0.5			dB

Notes:

- 1) Wavelength stability is achieved within 60 seconds (max) of power up.
- 2) BER=10⁻¹²; PRBS 2³¹-1@10.3125Gbps

General Specifications

Parameter	Symbol	Min	Typ	Max	Units
Bit Rate	BR	9.95		10.5	Gb/s
Bit Error Ratio	BER			10^{-12}	
Max. Supported Link Length	L_{MAX}		80		km

Notes:

- 1) BER= 10^{-12} ; PRBS $2^{31}-1$ @9.95Gbps~11.3Gbps.

Environmental Specifications

EXCxx92-3LCD80 transceivers have a commercial operating case temperature range of -5°C to $+75^{\circ}\text{C}$.

Parameter	Symbol	Min	Typ	Max	Units
Case Operating Temperature	T_{op}	-5		75	$^{\circ}\text{C}$
Storage Temperature	T_{sto}	-40		85	$^{\circ}\text{C}$

Notes:

- 1) Relative Humidity 5 - 85 %
- 2) Class 1 Laser Product EN 60825-1 Compliance

Digital Diagnostic Functions

As defined by the XFP MSA1, ETU-LINK XFP transceivers provide digital diagnostic functions via a 2-wire serial interface, which allows real-time access to the following operating parameters:

- Transceiver temperature
- Laser bias current
- Transmitted optical power
- Received optical power
- Transceiver supply voltage

It also provides a sophisticated system of alarm and warning flags, which may be used to alert end-users when particular operating parameters are outside of a factory-set normal range.

The operating and diagnostics information is monitored and reported by a Digital Diagnostics Transceiver Controller (DDTC) inside the transceiver, which is accessed through the 2-wire serial interface. When the serial protocol is activated, the serial clock signal (SCL pin) is generated by the host. The positive edge clocks data into the XFP transceiver into those segments of its memory map that are not write-protected.


The negative edge clocks data from the XFP transceiver. The serial data signal (SDA pin) is bi-directional for serial data transfer. The host uses SDA in conjunction with SCL to mark the start and end of serial protocol activation. The memories are organized as a series of 8-bit data words that can be addressed individually or sequentially. The 2-wire serial interface provides sequential or random access to the 8 bit parameters, addressed

from 000h to the maximum address of the memory.


Mechanical Specifications

ETU-LINK's XFP transceivers are compliant with the dimensions defined by the XFP Multi-Sourcing Agreement (MSA).


XFP Transceiver (dimensions are in mm)

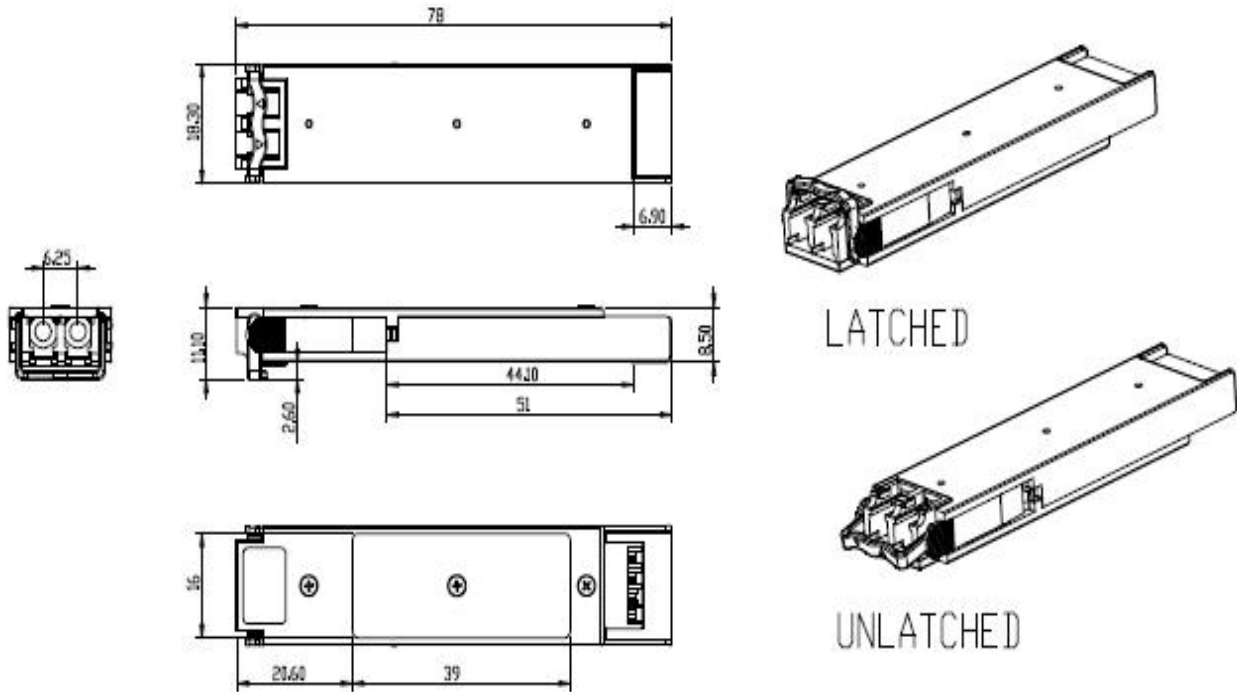


PCB Layout and Bezel Recommendations

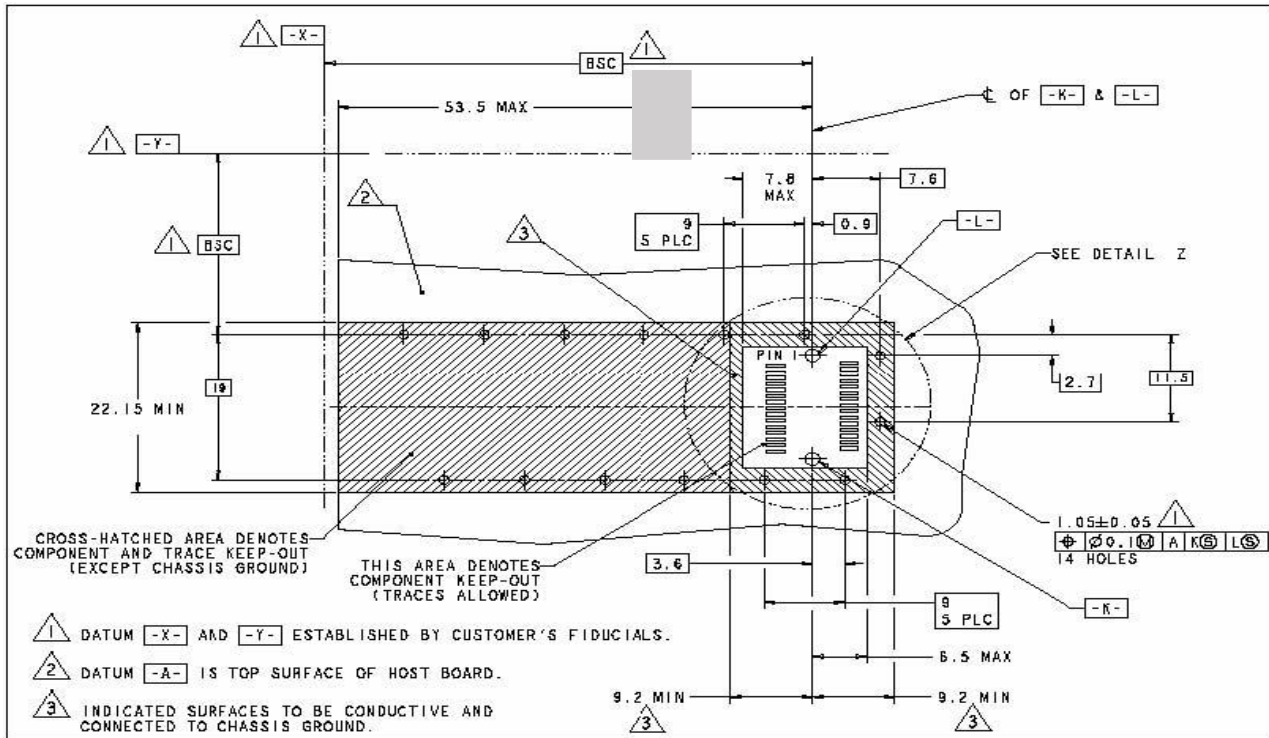

XFP Host Board Mechanical Layout (dimensions are in mm)

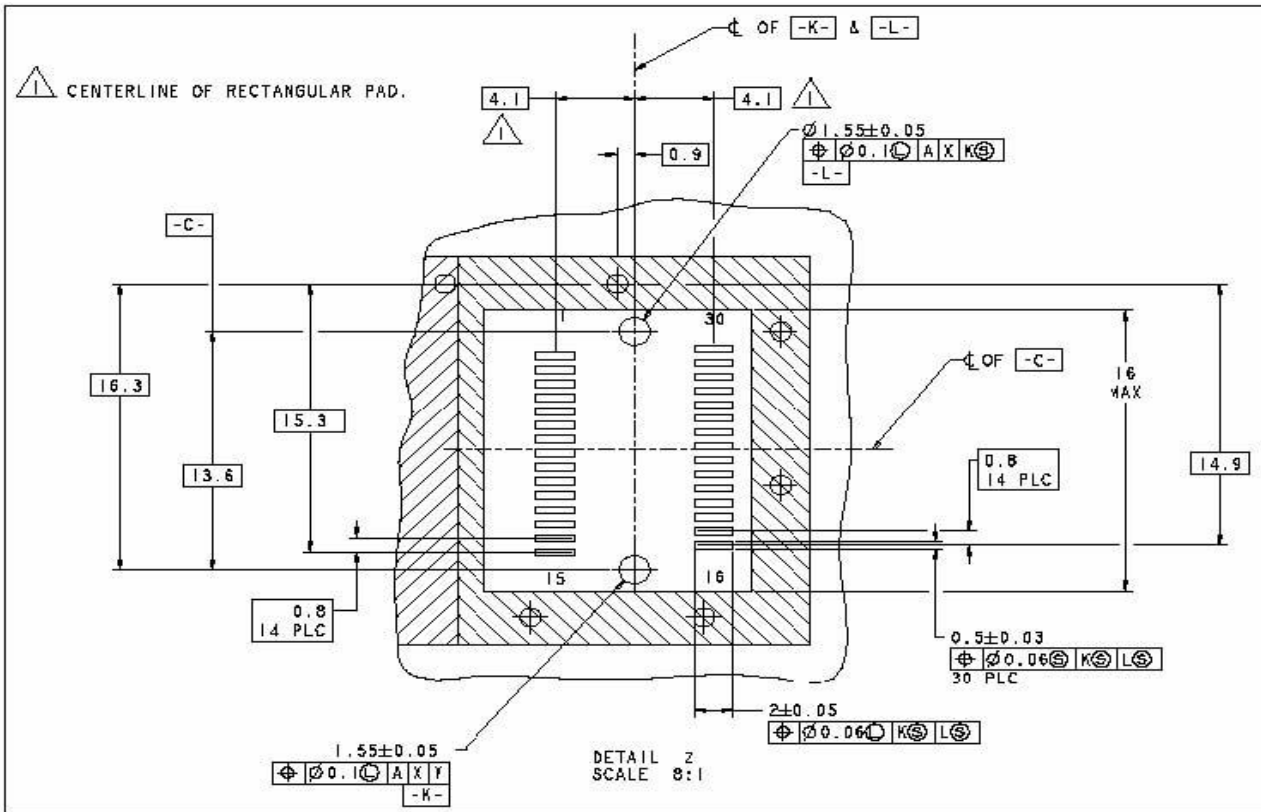

XFP Detail Host Board Mechanical Layout (dimensions are in mm)

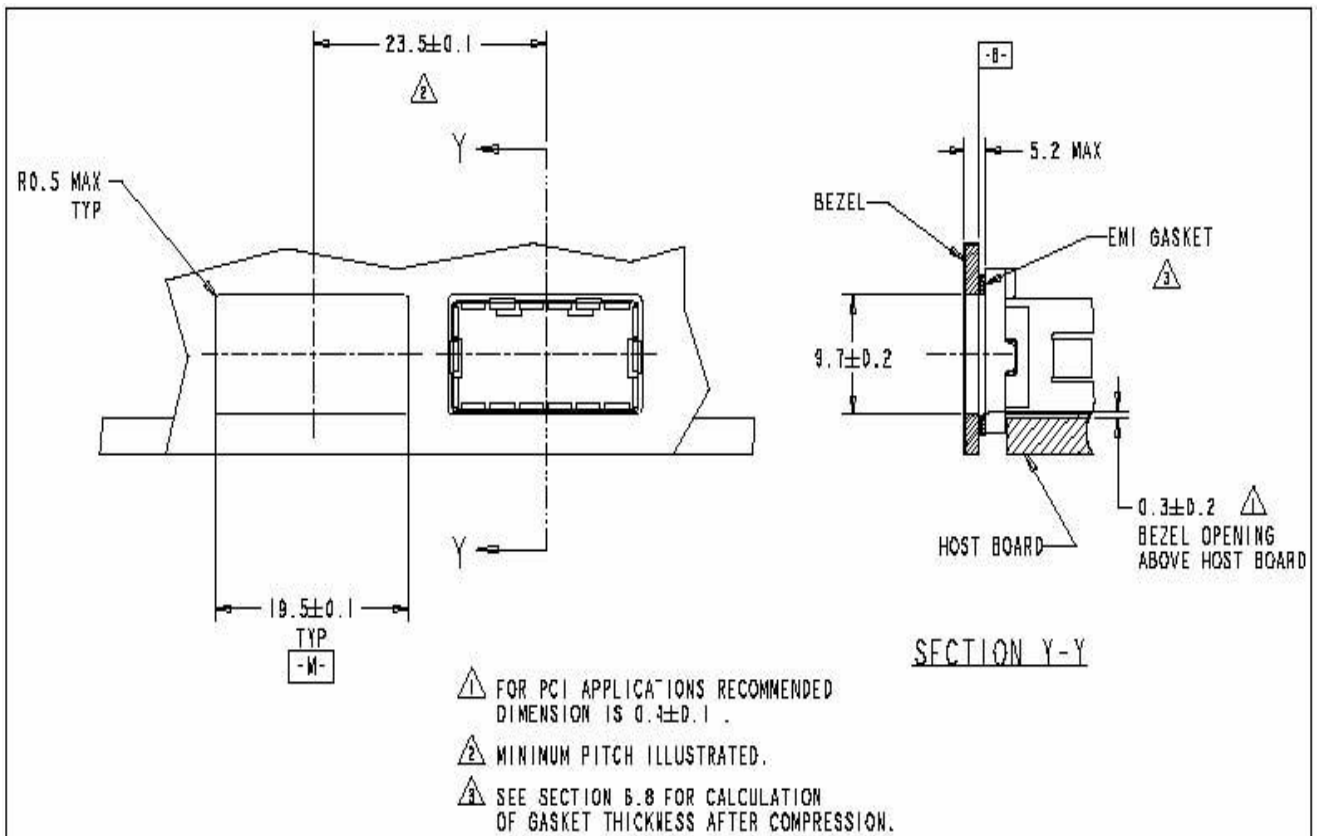

Regulatory Compliance

Feature	Reference	Performance
Electrostatic discharge (ESD)	IEC/EN 61000-4-2	Compatible with standards
Electromagnetic Interference (EMI)	FCC Part 15 Class B EN 55022 Class B (CISPR 22A)	Compatible with standards
Laser Eye Safety	FDA 21CFR 1040.10, 1040.11 IEC/EN 60825-1, 2	Class 1 laser product
Component Recognition	IEC/EN 60950, UL	Compatible with standards
ROHS	2002/95/EC	Compatible with standards
EMC	EN61000-3	Compatible with standards

Compatibility Test

In order to ensure the product compatibility, our products will be tested on the switch before shipment. Our modules can compatible with many mainstream brand switches, such as Cisco, Juniper, Extreme, Brocade, IBM, H3C, HP, Huawei, D-Link, Mikrotik, ZTE, TP-Link...

Our test equipment: VOLKTEK MEN-4110, HP 2530-8G, CRS226-24G-25+RM, Catalyst 2960G Series, Catalyst 3850 XS 10G SFP+, Catalyst 3750-E Series, HUAWEI S5700Series, H3C S3100V2 Series, Juniper-EX4200, etc.




HP 1800-24G J9028B



Juniper-EX4200



Cisco Nexus N9K-C9396PX

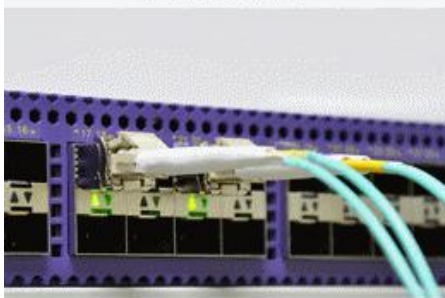

Extreme Networks-X670




Cisco WS-C4500X-16SFP+



Cisco catalyst 4948E-F



Brocade VDX6700

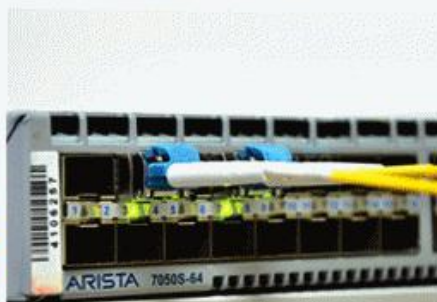

ARISTA 7950S-64



3COM Switch 3848

Packaging

ETU-Link provides two kinds of packaging, 10pcs/Tray and individual package.



Company: ETU-Link Technology Co., LTD

Address: 4th Floor, C Building, JinBoLong Industrial Park, QingQuan Road, LongHua District, Shenzhen city, GuangDong

Tel: +86-755 2328 4603

Addresses and phone number also have been listed at www.etulinktechnology.com.

Please e-mail us at sales@etulinktechnology.com or call us for assistance.